

# Convex Optimization in Electrical Engineering

Stephen Boyd and Lieven Vandenberghe  
EE Dept., Stanford

ISL EE370 Seminar, 2/9/96

1

## Main idea

---


- many electrical engineering design problems can be cast as **convex optimization problems**
- such problems can appear very difficult, but can be solved **very efficiently** by recently developed methods
- (unfortunately) convexity is often not recognized, hence not exploited

2

## Example 1

---

- linear elastic structure; forces  $f_1, \dots, f_{100}$  induce deflections  $d_1, \dots, d_{300}$
- $0 \leq f_i \leq F_i^{\max}$ , several hundred other constraints: max load per floor, max wind load per side, etc.



**Problem 1a:** find worst-case deflection, *i.e.*,  $\max_i |d_i|$

**Problem 1b:** find worst-case deflection, with each force “on” or “off”, *i.e.*,  $f_i = 0$  or  $F_i^{\max}$

3

## Example 1

---

problem 1a is **very easy**

- readily solved in a few minutes on small workstation
- general problem has polynomial complexity

problem 1b is **very difficult**


- could take weeks to solve . . .
- general problem NP-complete

4

## Example 2

---

polytope described by linear inequalities,  $a_i^T x \leq b_i, i = 1, \dots, L$

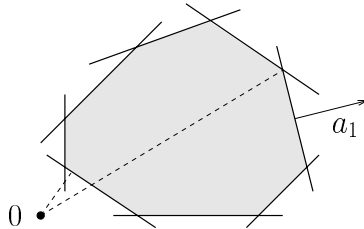

**Problem 2a:** find point **closest** to origin, *i.e.*,  $\min \|x\|$

**Problem 2b:** find point **farthest** from origin, *i.e.*,  $\max \|x\|$

5

## Example 2

---

problem 2a is **very easy**

- readily solved on small workstation
- polynomial complexity

problem 2b is **very difficult**

- difficult even with supercomputer
- NP-complete

6

moral:

**very difficult** and **very easy** problems can look quite similar

7

## Outline

---

- **Convex optimization**
- Examples
- Interior-point methods

8

## Convex optimization

---

minimize  $f_0(x)$

subject to  $f_1(x) \leq 0, \dots, f_L(x) \leq 0$

$f_i : \mathbf{R}^n \rightarrow \mathbf{R}$  are convex, *i.e.*, for all  $x, y, 0 \leq \lambda \leq 1$ ,

$$f_i(\lambda x + (1 - \lambda)y) \leq \lambda f_i(x) + (1 - \lambda)f_i(y)$$

- can have linear equality constraints
- differentiability not needed
- examples: linear programs (LPs), problems 1a, 2a
- other formulations possible (feasibility, multicriterion)

9

(roughly speaking,)

### Convex optimization problems are fundamentally tractable

- computation time is small, grows gracefully with problem size and required accuracy
- large problems solved quickly in practice
- what “solve” means:
  - find **global** optimum within a given tolerance, or,
  - find **proof** (certificate) of infeasibility
- not widely enough appreciated

10

## Outline

---

- Convex optimization
- **Examples**
- Interior-point methods

11

## Well-known example: FIR filter design

---

transfer function:  $H(z) \triangleq \sum_{i=0}^n h_i z^{-i}$

design variables:  $x \triangleq [h_0 \ h_1 \ \dots \ h_n]^T$


sample convex constraints:

- $H(e^{j0}) = 1$  (unity DC gain)
- $H(e^{j\omega_0}) = 0$  (notch at  $\omega_0$ )
- $|H(e^{j\omega})| \leq 0.01$  for  $\omega_s \leq \omega \leq \pi$   
(min. 40dB atten. in stop band)
- $|H(e^{j\omega})| \leq 1.12$  for  $0 \leq \omega \leq \omega_b$   
(max. 1dB upper ripple in pass band)
- $h_i = h_{n-i}$  (linear phase constraint)
- $s(t) \triangleq \sum_{i=0}^t h_i \leq 1.1H(e^{j0})$  (max. 10% step response overshoot)


12

## FIR filter design example (M. Grant)

- sample rate  $2/n \text{ sec}^{-1}$
- linear phase
- max  $\pm 1\text{dB}$  ripple up to  $0.4\text{Hz}$
- min  $40\text{dB}$  atten above  $0.8\text{Hz}$
- minimize  $\max_i |h_i|$
- some solution times:  
 $n = 255$ : 5 sec  
 $n = 2047$ : 4 min

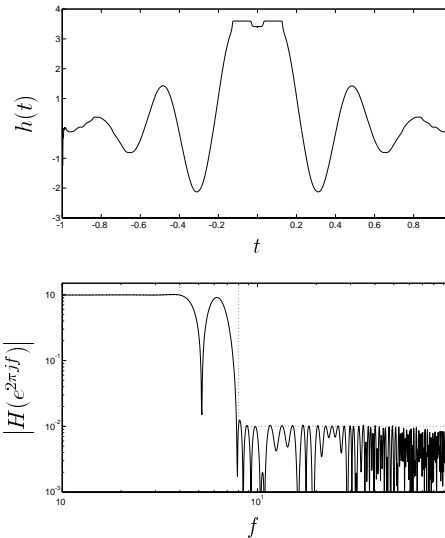

13

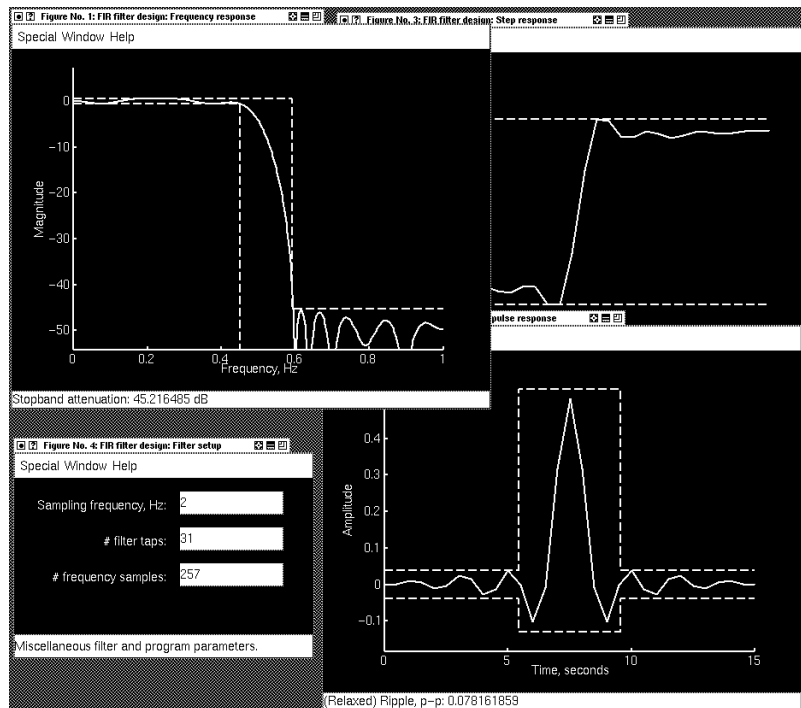


14

## Beamforming

---

omnidirectional antenna elements at positions  $p_1, \dots, p_n \in \mathbf{R}^2$   
 plane wave incident from angle  $\theta$ :

$$\exp j(k(\theta)^T p - \omega t), \quad k(\theta) = -[\cos \theta \quad \sin \theta]^T$$

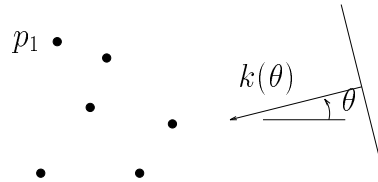

demodulate to get  $y_i = \exp(jk(\theta)^T p_i)$

form weighted sum  $y(\theta) = \sum_{i=1}^n w_i y_i$

design variables:  $x = [\mathbf{Re} \ w^T \ \mathbf{Im} \ w^T]^T$   
 (antenna array weights or shading coefficients)

$G(\theta) \triangleq |y(\theta)|$  antenna gain pattern

15

Sample convex constraints:

- $y(\theta_t) = 1$  (target direction normalization)
- $G(\theta_0) = 0$  (null in direction  $\theta_0$ )
- $w$  is real (amplitude only shading)
- $|w_i| \leq 1$  (attenuation only shading)

Sample convex objectives:

- $\max \{G(\theta) \mid |\theta - \theta_t| \geq 5^\circ\}$   
 (sidelobe level with  $10^\circ$  beamwidth)
- $\sigma^2 \sum_i |w_i|^2$  (noise power in  $y$ )

16



## Open-loop trajectory planning

---

discrete-time linear system, input  $u(t) \in \mathbf{R}^p$ , output  $y(t) \in \mathbf{R}^q$

sample convex constraints:

- $|u_i(t)| \leq U$  (limit on input amplitude)
- $|u_i(t+1) - u_i(t)| \leq S$  (limit on input slew rate)
- $l_i(t) \leq y_i(t) \leq u_i(t)$  (envelope bounds for output)

sample convex objective:

- $\max_{t,i} |y_i(t) - y_i^{\text{des}}(t)|$  (peak tracking error)

17

## Robust open-loop trajectory planning

---

input must work well with **multiple plants**

one input  $u$  applied to  $L$  plants; outputs are  $y^{(1)}, \dots, y^{(L)}$

constraints are to hold for **all**  $y^{(i)}$

sample objectives:


- weighted sum of objectives for each  $i$  (average performance)
- max over objectives for each  $i$  (worst-case performance)

18


## Example

- two plants
- $0 \leq u(t) \leq 1$
- $|\Delta u(t)| \leq 1.25/\text{sec}$
- minimize worst-case peak tracking error
- 128 time samples (variables)


Plant step responses



$u^{\text{opt}}$



$y_1, y_2, y^{\text{des}}$





19

## VLSI transistor sizing

subcircuit during transition contains  $R$ s,  $C$ s:

'on' transistor resistances; drain, source to ground capacitances

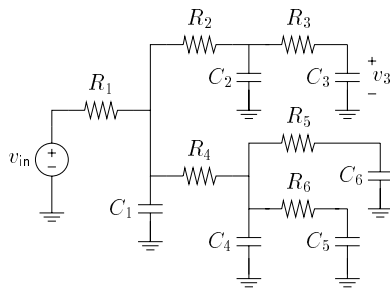

- $x_i$ : size (width) of transistors, so total area is  $A(x) = f^T x + g$
- 'on' conductance of transistor  $i$ :  $g_i = \alpha x_i$
- capacitance at node  $j$ :  $c_j = a_j^T x + b_j$
- sample problem: minimize area s.t. max delay, limits on widths

20

## Approximation via dominant time constant

circuit dynamics:  $C(x)\frac{dv}{dt} = -G(x)v(t)$

- conductance matrix  $G(x)$ , capacitance matrix  $C(x)$  affine in  $x$
- solutions have form  $v(t) = \sum_i \alpha_i e^{\lambda_i t}$
- eigenvalues  $0 > \lambda_1 \geq \lambda_2 \geq \dots \geq \lambda_n$  given by

$$\det(\lambda_i C(x) + G(x)) = 0$$

- slowest (“dominant”) time constant given by  $T_{\text{dom}} = -1/\lambda_1$  (related to delay)
- $T_{\text{dom}} \leq T_{\text{max}} \iff (-1/T_{\text{max}})C(x) + G(x) \geq 0$


**Problem:** (convex, in fact, a semidefinite program)

minimize  $A(x)$   
 subject to  $(-1/T_{\text{max}})C(x) + G(x) \geq 0$ ,  $x_i^{\min} \leq x_i \leq x_i^{\max}$

21

## Transmitter power allocation

- $m$  transmitters,  $mn$  receivers all at same frequency
- transmitter  $i$  wants to transmit to  $n$  receivers labeled  $(i, j)$ ,  $j = 1, \dots, n$

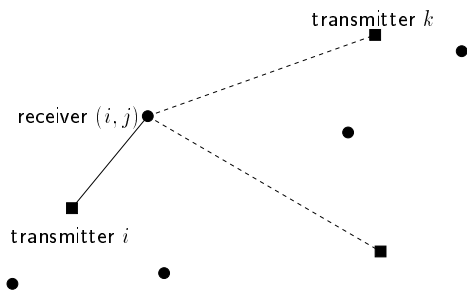

- $A_{ijk}$  is path gain from transmitter  $k$  to receiver  $(i, j)$
- $N_{ij}$  is (self) noise power of receiver  $(i, j)$
- variables: transmitter powers  $p_k$ ,  $k = 1, \dots, m$

22

signal power at receiver  $(i, j)$ :  $S_{ij} = A_{ij}p_i$

noise plus interference power at receiver  $(i, j)$ :  $I_{ij} = \sum_{k \neq i} A_{ijk}p_k + N_{ij}$

signal to interference/noise ratio (SINR) at receiver  $(i, j)$ :  $S_{ij}/I_{ij}$

**Problem:** choose  $p_i$  to maximize smallest SINR:

$$\begin{aligned} & \text{maximize} \quad \min_{i,j} \frac{A_{ij}p_i}{\sum_{k \neq i} A_{ijk}p_k + N_{ij}} \\ & \text{subject to} \quad 0 \leq p_i \leq p_{\max} \end{aligned}$$

... a (quasi-) convex problem (same methods work)

23

## Other examples

---

- control system analysis and design
- array signal processing, *e.g.*, broadband beamforming
- filter/controller realization
- experiment design & system identification
- structural optimization, *e.g.*, truss design
- design centering & yield maximization
- statistical signal processing
- computational geometry

24

## Outline

---

- Convex optimization
- Examples
- **Interior-point methods**

25

## Interior-point convex programming methods

---

history:

- Dikin; Fiacco & McCormick's SUMT (1960s)
- Karmarkar's LP algorithm (1984); many more since then
- Nesterov & Nemirovsky's general formulation (1989)

general:

- # iterations small, grows slowly with problem size  
(typical number: 5 – 50)
- each iteration is basically least-squares problem  
(hence can exploit problem structure via conjugate-gradients)


26

## Basic idea (oversimplified)

---

choose (potential fct.)  $\varphi$  s.t.

- $\varphi$  smooth
- $\varphi(x) \rightarrow +\infty$   
as  $x \rightarrow$  feasible set boundary
- $\varphi(x) \rightarrow -\infty$  as  $x \rightarrow$  optimal



minimize  $\varphi$  by (modified) Newton method

each Newton step is (mostly) a least-squares problem

**if  $\varphi$  is properly chosen:**

algorithm is polynomial, extremely efficient in practice

27

## Conclusions

---

- diverse EE design problems can be cast as convex optimization problems, hence efficiently solved
- applications: numerical engines for CAD tools, embedded systems

as available computing power increases, this observation becomes more relevant

28

## How many practical problems are convex?

---

many, but certainly not all, or even most

**myth # 1:** very few practical problems are convex

**myth # 2:** it's very hard to determine convexity in practice

these are self-propagating

29

**... the great watershed in optimization isn't between linearity and nonlinearity, but convexity and nonconvexity.**

— R. Rockafellar, SIAM Review 1993

30

## (Pointers to) references

---

where:

- anonymous ftp to `isl.stanford.edu`, in `pub/boyd`
- URL `http://www-isl.stanford.edu/boyd`

what:

- survey articles with **many** references
- code
- lecture notes for EE392: *Introduction to Convex Optimization with Engineering Applications*

**Course:** EE364, Winter 1996-7