

Separable linear image processing

- Impulse response is separable in $[x, \alpha]$ and $[y, \beta]$, i.e., can be written as

$$g[\alpha, \beta] = \sum_{x=0}^{N-1} \sum_{y=0}^{L-1} f[x, y] \cdot h_x[x, \alpha] h_y[y, \beta]$$

- Processing can be carried out
 - row by row, then column by column

$$g[\alpha, \beta] = \sum_{y=0}^{L-1} h_y[y, \beta] \sum_{x=0}^{N-1} f[x, y] \cdot h_x[x, \alpha]$$

- column by column, then row by row

$$g[\alpha, \beta] = \sum_{x=0}^{N-1} h_x[x, \alpha] \sum_{y=0}^{L-1} f[x, y] \cdot h_y[y, \beta]$$

Separable linear image processing (cont.)


- If the digital input and output images are written as a matrices \mathbf{g} and \mathbf{f} , we can conveniently write

$$\mathbf{g} = \mathbf{H}_y^T \cdot \mathbf{f} \cdot \mathbf{H}_x$$
$$\mathbf{H}_y = \begin{bmatrix} h_y[0,0] & h_y[0,1] & \cdots & h_y[0,L_g-1] \\ h_y[1,0] & h_y[1,1] & \cdots & h_y[1,L_g-1] \\ \vdots & \vdots & & \vdots \\ h_y[L-1,0] & h_y[L-1,1] & \cdots & h_y[L-1,L_g-1] \end{bmatrix}$$
$$\mathbf{H}_x = \begin{bmatrix} h_x[0,0] & h_x[0,1] & \cdots & h_x[0,N_g-1] \\ h_x[1,0] & h_x[1,1] & \cdots & h_x[1,N_g-1] \\ \vdots & \vdots & & \vdots \\ h_x[N-1,0] & h_x[N-1,1] & \cdots & h_x[N-1,N_g-1] \end{bmatrix}$$

- Output image \mathbf{g} has size $L_g \times N_g$
- If the operator does not change image size, \mathbf{H}_x and \mathbf{H}_y are square matrices

Example: Separable Haar transform

Original *Bike*
256x256

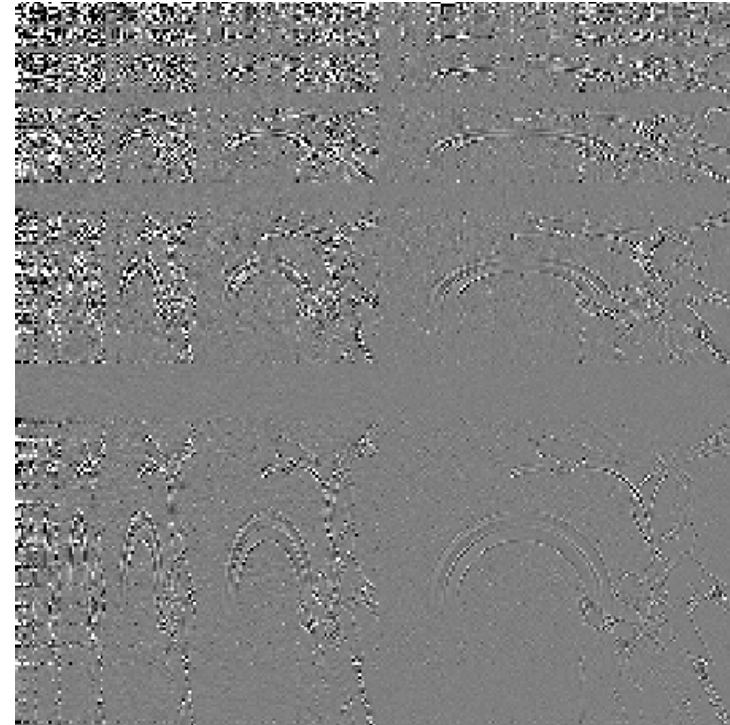

256x256
Haar transform
 $H_x = H_y = H_{r_{256}}$



Haar transform

- Haar transform matrix for sizes $N=2,4,8$

$$\mathbf{Hr}_2 = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 & 1 \\ 1 & -1 \end{pmatrix}$$

$$\mathbf{Hr}_4 = \frac{1}{\sqrt{4}} \begin{pmatrix} 1 & 1 & \sqrt{2} & 0 \\ 1 & 1 & -\sqrt{2} & 0 \\ 1 & -1 & 0 & \sqrt{2} \\ 1 & -1 & 0 & -\sqrt{2} \end{pmatrix}$$

$$\mathbf{Hr}_8 = \frac{1}{\sqrt{8}} \begin{pmatrix} 1 & 1 & \sqrt{2} & 0 & 2 & 0 & 0 & 0 \\ 1 & 1 & \sqrt{2} & 0 & -2 & 0 & 0 & 0 \\ 1 & 1 & -\sqrt{2} & 0 & 0 & 2 & 0 & 0 \\ 1 & 1 & -\sqrt{2} & 0 & 0 & -2 & 0 & 0 \\ 1 & -1 & 0 & \sqrt{2} & 0 & 0 & 2 & 0 \\ 1 & -1 & 0 & \sqrt{2} & 0 & 0 & -2 & 0 \\ 1 & -1 & 0 & -\sqrt{2} & 0 & 0 & 0 & 2 \\ 1 & -1 & 0 & -\sqrt{2} & 0 & 0 & 0 & -2 \end{pmatrix}$$

- Can be computed by taking sums and differences
- Fast algorithms by recursively applying \mathbf{Hr}_2

Example: Subsampling

- Image subsampling 2:1 horizontally and vertically
- Small input image of size 8x8, output image size 4x4

$$\mathbf{H}_x = \mathbf{H}_y = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 \end{bmatrix}$$



Example: Subsampling (cont.)

- A somewhat better technique for 2:1 image size reduction


$$\mathbf{H}_x = \mathbf{H}_y = \begin{bmatrix} 0.5 & 0 & 0 & 0 \\ 0.5 & 0 & 0 & 0 \\ 0 & 0.5 & 0 & 0 \\ 0 & 0.5 & 0 & 0 \\ 0 & 0 & 0.5 & 0 \\ 0 & 0 & 0.5 & 0 \\ 0 & 0 & 0 & 0.5 \\ 0 & 0 & 0 & 0.5 \end{bmatrix}$$



Side by side comparison

$$\mathbf{H}_x = \mathbf{H}_y =$$

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 \end{bmatrix}$$

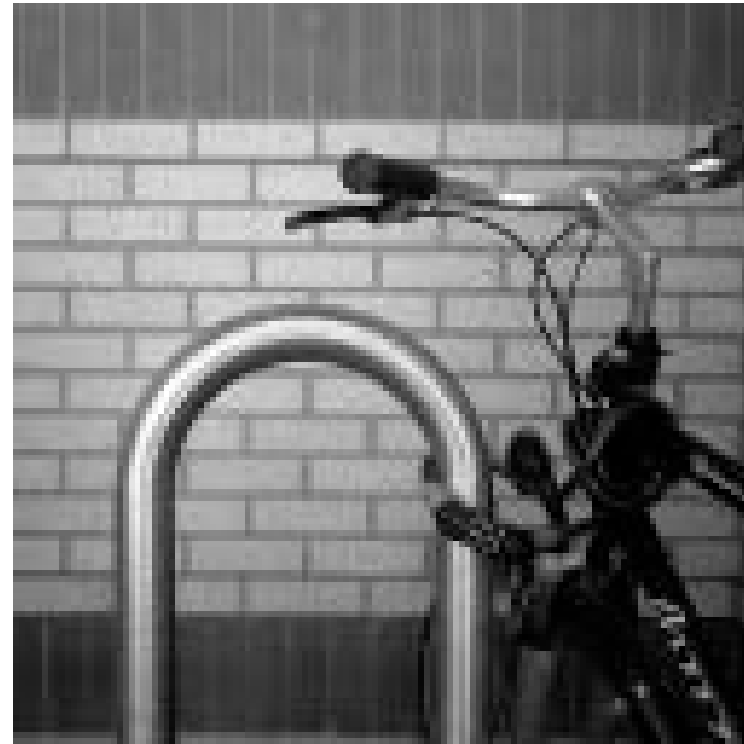

$$\mathbf{H}_x = \mathbf{H}_y =$$

$$\begin{bmatrix} 0.5 & 0 & 0 & 0 \\ 0.5 & 0 & 0 & 0 \\ 0 & 0.5 & 0 & 0 \\ 0 & 0.5 & 0 & 0 \\ 0 & 0 & 0.5 & 0 \\ 0 & 0 & 0.5 & 0 \\ 0 & 0 & 0 & 0.5 \\ 0 & 0 & 0 & 0.5 \end{bmatrix}$$



Another example: filtering

- Each pixel is replaced by the average of two horizontally (vertically) neighboring pixels

$$\mathbf{H}_x = \mathbf{H}_y = \begin{bmatrix} 0.5 & 0 & & \dots & & & & 0 \\ 0.5 & 0.5 & & & & & & \\ 0 & 0.5 & 0.5 & & & & & \\ & & & 0.5 & 0.5 & \ddots & & \vdots \\ \vdots & & & & 0.5 & 0.5 & & \\ & & & \ddots & 0.5 & 0.5 & & \\ & & & & & 0.5 & 0.5 & 0 \\ 0 & & & \dots & & 0 & 0.5 & 0.5 \end{bmatrix}$$

- Shift-invariant operation (except for image boundary)